MONITOR
PRODUCT GUIDE

ViewSonic®

EXCELLING WITH VIEWSONIC

Visual excellence is in our DNA, it is built into our mission statement and core values. Through an uncompromised commitment to quality, innovation and partnerships, ViewSonic has rapidly become a leader in the commercial and education display markets.

We are dedicated to meeting our customers' needs, exceeding their expectations and building long-term relationships upon a foundation of trust earned through delivering the reliable products that have made ViewSonic the worldwide display provider of choice for more than two decades.

ViewSonic is committed to be an industry pioneer. We offer a full line of LED displays with excellent performance, meeting worldwide environmental standards. We are dedicated to developing green products, emphasizing recycling and waste reduction and reducing our carbon footprint with ECO-saving design and mercury free materials.

With ViewSonic's versatile product lines, customers enjoy comprehensive display solutions. Come and experience the ViewSonic difference!

CONTENT TABLE

Education **1**

Education - Spec Table 3

Business **5**

Business - Spec Table 8

Touch **9**

Touch - Spec Table 12

Professional **13**

Professional - Spec Table 16

Thin Client & Display **17**

Thin Client & Display - Spec Table 20

EDUCATION

Educational institutions seeking to reduce their carbon footprint are sure to be enthralled by ViewSonic's VA series of monitors. These eco-friendly monitors are a great investment—with mercury-free LED backlighting and our proprietary Eco Mode, the VA series deliver striking and vivid images with lower power consumption and longer product lifetime—as compared to conventional monitors. Thanks to their Energy Star and TCO compliant features, the VA series helps educational institutions reduce costs and minimize the need for constant maintenance work. With sRGB colour correction technology and Colour Adjust, educational institutions can truly revolutionize the way lessons are conducted with our VA monitors which ensure that displayed content are of the most brilliant quality. The VA series comes in an array of screen sizes, from 17" to 27", and feature a selection of different inputs and in-built speakers which eliminates the extra cost and space for external speakers.

EDUCATION PRODUCT LIST

- VA705-LED
- VA926-LED
- VA1948a-LED
- VA1948m-LED
- VA2046m-LED
- VA2214S
- VA2246-LED
- VA2246m-LED
- VA2232w-LED
- VA2342-LED
- VA2349S
- VA2445-LED
- VA2445m-LED
- VA2746-LED

Planet-friendly mercury-free LED backlighting

ViewSonic's VA series feature energy-saving LED backlight. The LED backlight conserves up to 25% more energy than conventional displays and is a great investment for educational institutions.

Eco Mode conserves more energy

ViewSonic's proprietary Eco Mode function is built into all LED displays, allowing users to "optimize (75%)" or "conserve (50%)" energy based on the users' working scenarios. Both modes reduce display brightness and conserve up to 50% energy.

High-Quality Speakers for True Stereo Sound

ViewSonic's VA series are equipped with stereo speakers, for clear audio and sound worthy of a high-end stereo system. The speakers deliver a true stereo effect for an enhanced listening experience, especially when displaying multimedia during lessons. Users also need not purchase external speakers. Thanks to the Audio output, users can also connect an external headset to the monitors.

Models: VA1948m-LED, VA2046m-LED, VA2246m-LED, VA2445m-LED

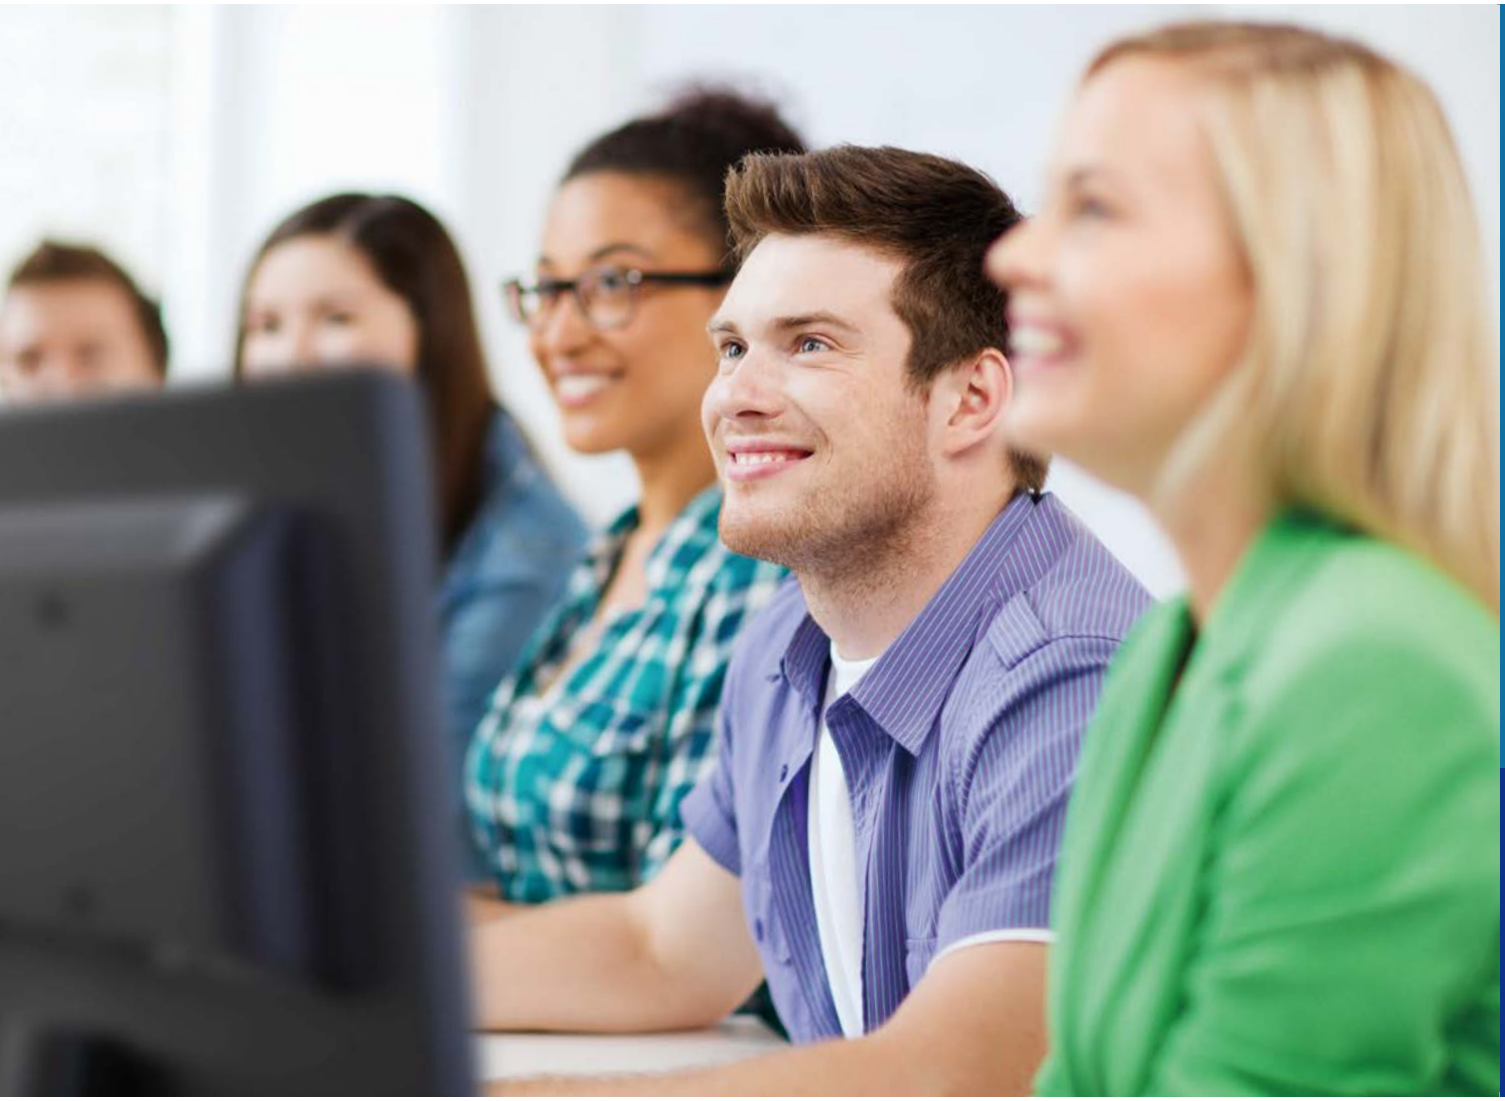

4:3 and 16:10 Legacy Format

ViewSonic's VA series also feature 4:3 and 16:10 formats which are great for users whose work requires a large viewing area. These enlarged on-screen areas are perfect for use as search tools in libraries. Users can display more content on a single screen, increasing productivity and convenience.

Models: VA705-LED(4:3), VA926-LED(4:3), VA1948a-LED(16:10), VA1948m-LED(16:10), VA2232w-LED (16:10)

VESA mountable& Kensington Lock for added security

ViewSonic's VA monitors are 100mm x 100mm VESA mountable, allowing users to mount their monitor on a monitor stand or wall for single or multiscreen displays, depending on their specific needs. Users can detach the base easily by unscrewing four screws and then mounting the display on its new stand or wall mount. The VA monitors are equipped with Kensington locks for added security and safety. Users can be ensured that their monitors are safe as the Kensington locks reduce the possibility of stealing or moving the monitors around the campus.

VGA & DVI connectivity for flexible input sources

Users have two connectivity options that allow them to switch between input sources via the on-screen menu, including digital DVI-D with HDCP and traditional analogue VGA input.

The features vary from model to model. Not every model carries the highlighted features. Please refer to attached spec table for detailed information.

SPEC TABLE

Product Model	VA705-LED	VA926-LED	VA1948a-LED	VA1948m-LED	VA2046m-LED	VA2214S	VA2246-LED
LCD Display	43cm / 17" LED	48cm / 19" LED	48cm / 19" LED	48cm / 19" LED	49.5cm / 19.5" LED	55cm / 21.5" VA LED	55cm / 21.5" LED
Resolution	1280 x 1024	1280 x 1024	1440 x 900	1440 x 900	1600 x 900	1920 x 1080	1920 x 1080
Aspect Ratio	4:3	4:3	16:10	16:10	16:9	16:9	16:9
Brightness	250 cd/m2	250 cd/m2	250 cd/m2	250 cd/m2	200 cd/m2	250 cd/m2	250 cd/m2
Contrast Ratio	1,000:1	1,000:1	1,000:1	1,000:1	600 : 1	3,000:1	1,000:1
Dynamic Contrast Ratio	10,000,000:1	10,000,000:1	10,000,000:1	10,000,000:1	10,000,000:1	10,000,000:1	10,000,000:1
Viewing Angles	170°/160°	170°/160°	170°/160°	170°/160°	90°/65°	178°/178°	170°/160°
Response Time	5ms	5ms	5ms	5ms	5ms	6ms	5ms
Video Connectors	D-Sub x 1	D-Sub x 1 DVI x 1	D-Sub x 1	D-Sub x 1 DVI x 1	D-Sub x 1 DVI x 1	D-Sub x 1 DVI x 1	D-Sub x 1 DVI x 1
Speakers	N/A	N/A	N/A	1W x 2	2W x 2	N/A	N/A
Audio Connectors	N/A	N/A	N/A	Audio In x 1	Audio In x 1	N/A	N/A
Special Feature	ECO mode	ECO mode	ECO mode	ECO mode	ECO mode	ECO mode	ECO mode
Ergonomics	Tilt: 20º ~ -3º	Tilt: 20º ~ -5º	Tilt: 20º ~ -5º	Tilt: 20º ~ -5º	Tilt: 20º ~ -5º	Tilt: 22º ~ -5º	Tilt: 18º ~ -5º
Power Consumption	16.45W (typ.) / 12.11W (ECO-mode)	18W (typ.) / 12W (ECO-mode)	15W (typ.) / 11W (ECO-mode)	18W (typ.) / 11W (ECO-mode)	18W (typ.) / 12W (ECO-mode)	23 W(typ.) / 18W (ECO-mode)	22 W(typ.) / 12W (ECO-mode)
Dimension with Stand (W x H x D) (mm) (inch)	379mm x 400mm x 210mm 15.0" x 15.8" x 8.3"	413mm x 440mm x 195mm 16.2" x 17.1" x 7.7"	457mm x 378mm x 221mm 18.0" x 14.9" x 8.7"	457mm x 378mm x 221mm 18.0" x 14.9" x 8.7"	479mm x 361mm x 198 mm 18.8" x 14.2" x 7.8"	512mm x 392mm x 190mm 20.1" x 15.4" x 7.4"	510mm x 367mm x 198mm 20.1" x 14.4" x 7.8"
Dimension without Stand (W x H x D) (mm) (inch)	379mm x 338mm x 68mm 15.0" x 13.3" x 2.7"	413mm x 355mm x 64mm 16.2" x 14" x 2.5"	457mm x 327mm x 39mm 18.0" x 12.9" x 1.6"	457mm x 327mm x 39mm 18.0" x 12.9" x 1.6"	479mm x 302mm x 49mm 18.8" x 11.9" x 1.9"	512mm x 310mm x 53mm 20.1" x 12.2" x 2.1"	510mm x 317mm x 49mm 20.1" x 12.5" x 1.9"
Weight with Stand	3.98kg (8.78lbs)	3.47Kg (7.65 lbs)	3.15 Kg (6.94 lbs)	3.20 Kg (7.07 lbs)	3.0 Kg (6.6lbs)	2.82 Kg (6.42 lbs)	3.48 Kg (7.67 lbs)
Weight without Stand	2.9kg(6.39lbs)	3.14Kg (6.91 lbs)	2.88 Kg (6.35 lbs)	2.93Kg (6.46 lbs)	2.6 Kg (5.73lbs)	2.61 Kg (5.7156 lbs)	3.13 Kg (6.90 lbs)
VESA® Mount	100mm x 100mm	100mm x 100mm	100mm x 100mm	100mm x 100mm	100mm x 100mm	100mm x 100mm	100mm x 100mm
Kensington Lock Slot	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Compliance	CE, CB, TCO, TUV, Gost-R, ROHS, EnergyStar, FCC, Windows	CB, TCO, Gost-R, ROHS, EnergyStar, FCC, Windows	CE, CB, TCO, Gost-R, ROHS, UkrSEPRO, ErP, EnergyStar, FCC, Windows	CE, CB, TCO, Gost-R, ROHS, UkrSEPRO, ErP, EnergyStar, FCC, Windows	CE, CB, CU, ROHS, UkrSEPRO, ErP, Windows	CE, CB, TCO, Gost-R, ROHS, UkrSEPRO, ErP, EnergyStar, FCC, Windows	CE, CB, CU, ROHS, UkrSEPRO, ErP, EnergyStar, FCC, Windows

VA2246m-LED	VA2232w-LED	VA2342-LED	VA2349S	VA2445-LED	VA2445m-LED	VA2746-LED
55cm / 21.5" LED	56cm / 22" LED	58cm / 23" LED	58cm / 23" IPS LED	60cm / 23.6" LED	60cm / 23.6" LED	68cm / 27" LED
1920 x 1080	1680 x 1050	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080
16:9	16:10	16:9	16:9	16:9	16:9	16:9
250 cd/m2	250 cd/m2	250 cd/m2	250 cd/m2	250 cd/m2	250 cd/m2	300 cd/m2
1,000:1	1,000:1	1,000:1	1,000:1	1,000:1	1,000:1	1,200:1
10,000,000:1	10,000,000:1	10,000,000:1	20,000,000:1	10,000,000:1	10,000,000:1	20,000,000:1
170°/160°	170°/160°	170°/160°	178°/178°	170°/160°	170°/160°	170°/160°
5ms	5ms	5ms	14ms	5ms	5ms	3.4ms
D-Sub x 1 DVI x 1	D-Sub x 1 DVI x 1	D-Sub x 1 DVI x 1	D-Sub x 1 DVI x 1	D-Sub x 1 DVI x 1	D-Sub x 1 DVI x 1	D-Sub x 1 DVI x 1
2W x 2	N/A	N/A	N/A	N/A	2W x 2	N/A
Audio In x 1	N/A	N/A	N/A	N/A	Audio In x 1	N/A
ECO mode	ECO mode	ECO mode	ECO mode	ECO mode	ECO mode	ECO mode
Tilt: 18º ~ -5º	Tilt: 20º ~ -5º	Tilt: 15º ~ -5º	Tilt: 20º ~ -5º	Tilt: 20º ~ -5º	Tilt: 20º ~ -5º	Tilt: 20º ~ -5º
28W (typ.) / 15W (ECO-mode)	20W (typ.) / 14W (ECO-mode)	22W (typ.) / 16W (ECO-mode)	22W (typ.) / 15W (ECO-mode)	22W (typ.) / 15W (ECO-mode)	26W (typ.) / 17W (ECO-mode)	33W (typ.) / 18W (ECO-mode)
510mm x 367mm x 198mm 20.1" x 14.4" x 7.8"	511mm x 417mm x 196mm 20.1" x 16.4" x 7.7"	548mm x 415mm x 164mm 21.6" x 16.4" x 6.5"	549mm x 396mm x 214mm 21.6" x 15.6" x 8.5"	572mm x 401mm x 212mm 22.5" x 15.8" x 8.3"	572mm x 401mm x 212mm 22.5" x 15.8" x 8.3"	646mm x 443mm x 248mm 25.4" x 17.5" x 9.8"
510mm x 317mm x 49mm 20.1" x 12.5" x 1.9"	511mm x 353mm x 62mm 20.1" x 13.9" x 24.1"	548mm x 333mm x 38mm 21.6" x 13.2" x 1.5"	549mm x 339mm x 50mm 21.6" x 13.4" x 2.0"	572mm x 351mm x 51mm 22.5" x 14.8" x 2.0"	572mm x 351mm x 51mm 22.5" x 14.8" x 2.0"	646mm x 399mm x 57mm 25.4" x 15.7" x 2.3"
3.48 Kg (7.67 lbs)	3.91 Kg (8.6 lbs)	2.55 Kg (5.62 lbs)	3.9 Kg (8.58 lbs)	4.1 Kg (9.04 lbs)	4.1 Kg (9.04 lbs)	5.26 Kg (11.60 lbs)
3.13 Kg (6.90 lbs)	3.54 Kg (7.8 lbs)	2.25 Kg (4.96 lbs)	3.5 Kg (7.7 lbs)	3.72 Kg (8.20 lbs)	3.72 Kg (8.20 lbs)	4.85 Kg (10.69 lbs)
100mm x 100mm	100mm x 100mm	100mm x 100mm	100mm x 100mm	100mm x 100mm	100mm x 100mm	100mm x 100mm
Yes	Yes	Yes	Yes	Yes	Yes	Yes
CE, CB, CU, ROHS, UkrSEPRO, ErP, EnergyStar, FCC, Windows	CE, CB, CU, Gost-R, ROHS, UkrSEPRO, FCC, Windows	CE, CB, CU, TCO, Gost-R, ROHS, UkrSEPRO, ErP, EnergyStar, EPEAT, FCC, Windows	CE, CB, CU, ROHS, UkrSEPRO, ErP, EnergyStar, EPEAT, FCC, Windows	CE, CB, CU, ROHS, UkrSEPRO, ErP, EnergyStar, EPEAT, FCC, Windows	CE, CB, CU, ROHS, UkrSEPRO, ErP, EnergyStar, EPEAT, FCC, Windows	CE, CB, CU, ROHS, UkrSEPRO, ErP, Windows

BUSINESS

ViewSonic's VG series monitors are perfect for businesses seeking to increase their productivity and efficiency. These monitors not only deliver the sharpest and most brilliant images, but they also feature a highly ergonomic design and versatile inputs. Their matte-finish, slim-bezel screens together with VESA mount make these monitors perfect for multi-screen usage. The VG series also feature a webcam for video conferencing, speakers and multiple USB ports for connecting with peripherals and storage devices. ViewSonic offers a variety of solutions for all your office display needs, from ergonomic desktop displays to web conferencing and more.

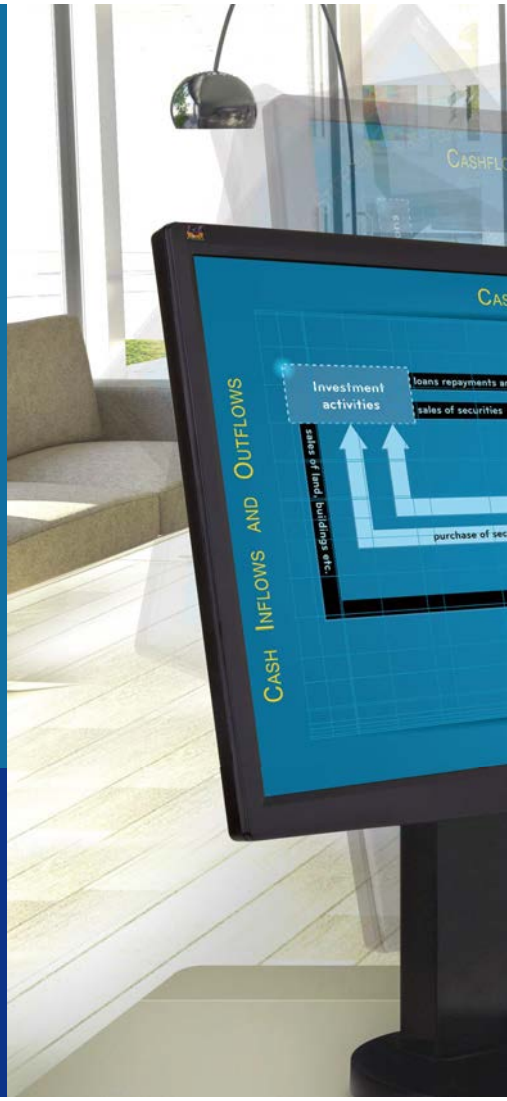

BUSINESS PRODUCT LIST

- VG2039m-LED
- VG2233-LED
- VG2233Smh
- VG2239m-LED
- VG2433-LED
- VG2433Smh
- VG2437mc-LED
- VG2439m-LED
- VG2732m-LED

Full HD 1080p resolution

With Full HD 1920 x 1080 resolution, experience amazing detail and clarity when working with productivity software. With a large 16:9 widescreen viewing area, users can easily operate multiple windows side-by-side to facilitate a more efficient work environment.

Ergonomic design for comfortable working environments

The VG series feature a fantastic ergonomic design with an adjustable base capable of suiting any working environment. Users are able to adjust the base from front to back with 25° of adjustment as well as 90° of rotating pivot, 360° of horizontal swivel and a height adjust of up to 13.5 cm. The multi-adjusting ergonomic design provides users with a comfortable working environment and a delightful viewing experience while enhancing work efficiency.

SuperClear™ IPS wide viewing angles for consistent colour performance

ViewSonic's SuperClear™ IPS (In-Plane Switching) is a high-end LCD technology that reduces the amount of light scattering to offer you 178-degree vertical and horizontal wide viewing angles. SuperClear™ IPS displays also feature accurate colour reproduction to provide users with an excellent viewing experience. Experience accurate, vivid colours and consistent brightness levels whether you're looking at the screen from above, below, the front or the side.

Models: VG2233Smh, VG2433Smh



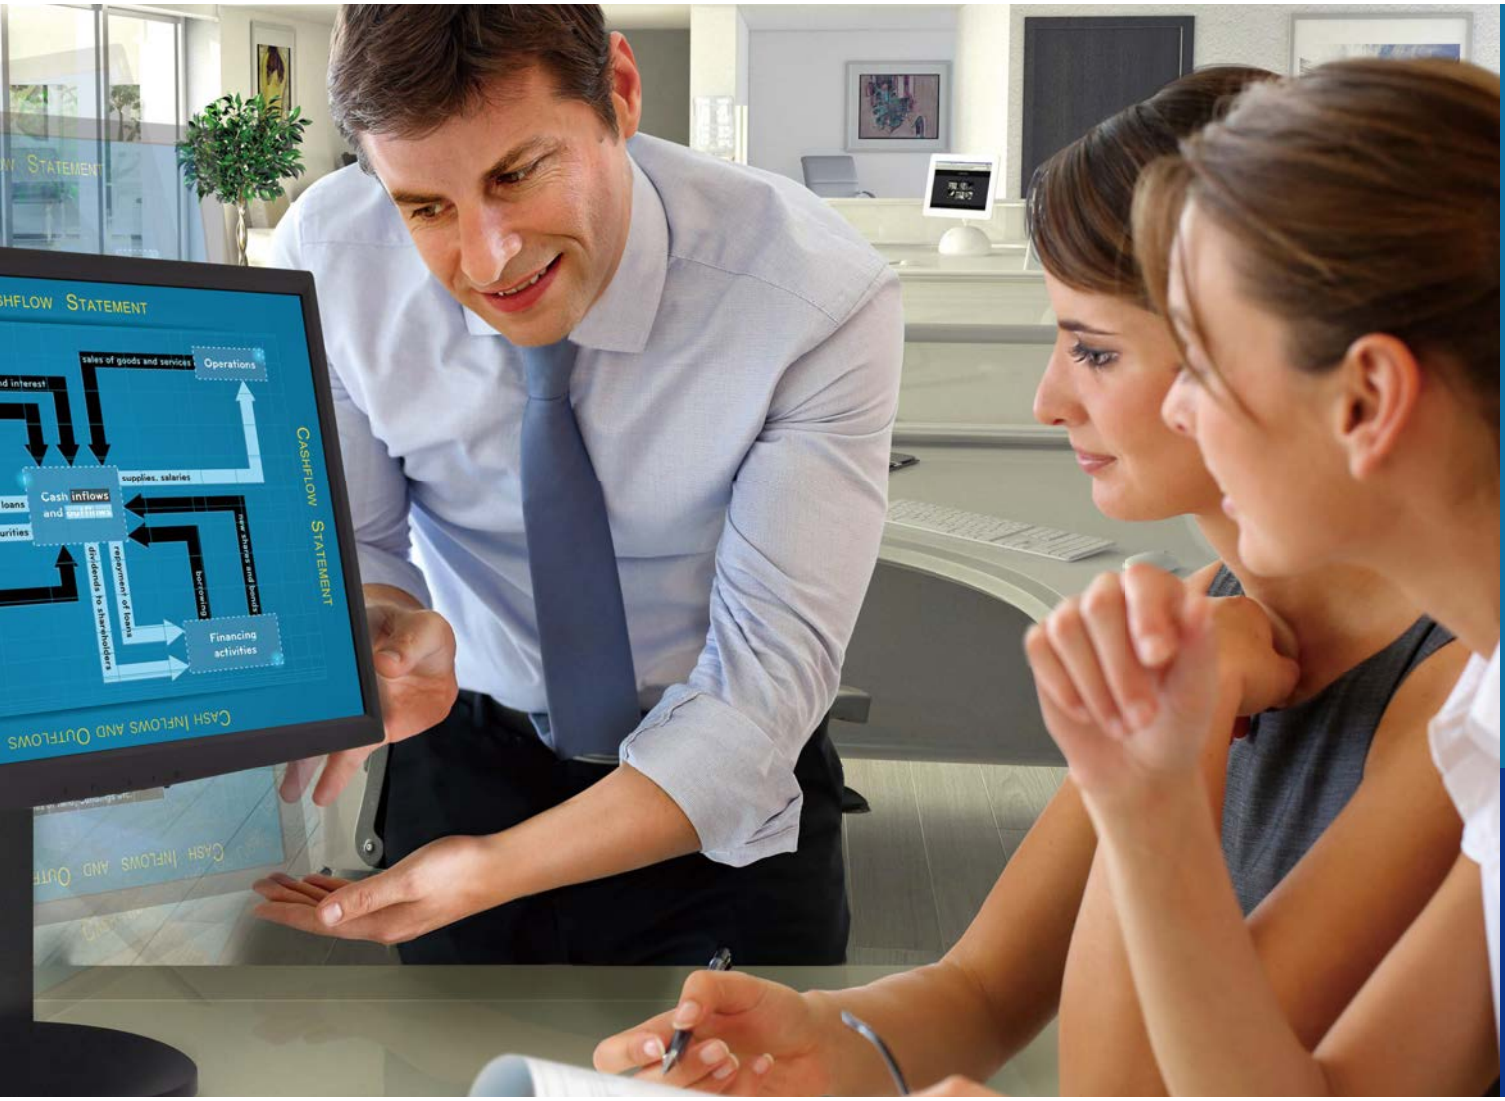

USB ports for convenient and flexible connectivity

The VG series are equipped with multiple USB ports to provide users with convenient connection options, helping users save time when plugging USB storage devices, peripherals and accessories into hard-to-reach computer USB ports and expands the number USB ports.

Models: All models (excluding VG2233-LED, VG2233Smh, VG2433-LED, VG2433Smh)

All-in-One Video/ IP Conferencing Solution

With a built-in webcam, microphone and speakers, the VG monitors enable you to stay easily connected with partners and colleagues regardless of your geographical location. This monitor becomes a one-stop solution for web conferencing with outstanding video and audio performance. The VG series is also compatible with leading video conferencing applications and supports external headphones and microphones, so that users can experience additional privacy during their video conferences.

Models: VG2437mc-LED

Sleek, Slim and Matte-bezel design for building multiple screens

The slim and matte-bezel makes the VG monitors perfect for multiscreen applications. When building multiple screens, the edges of the VG monitors are essentially unnoticeable thanks to their sleek, low-profile finish. Furthermore, the matt bezel reduces light reflections. Users can greatly increase their productivity for work that requires multiple large screens to view mission critical data.

BUSINESS

DisplayPort Input

The VG series is equipped with a DisplayPort digital interface, which transmits audio and video signals through a single connection from all kinds of multimedia devices in video production, graphic design and more. In addition to DisplayPort, DVI-D digital and VGA analogue ports are also available with a convenient way of switching between input sources though the on-screen display menu to increase the usage of your monitor with many devices.

Models: VG2039m-LED, VG2239m-LED, VG2439m-LED, VG2437mc-LED, VG2732m-LED

VESA mountable

ViewSonic VG monitors are 100mm x 100mm VESA mountable, allowing users to mount their monitor on a monitor stand or wall for single or multiple-screens, depending on their specific needs. Users can detach the base easily by unscrewing four screws and then mounting the display on its new stand or wall mount.

Eco Mode conserves more energy

ViewSonic's proprietary Eco Mode function is built into all LED displays, allowing users to "optimize (75%)" or "conserve (50%)" energy. Both modes reduce display brightness and conserve up to 50% more energy.

The features vary from model to model. Not every model carries the highlighted features. Please refer to attached spec table for detailed information

SPEC TABLE

Product Model	VG2039m-LED	VG2233-LED	VG2233Smh	VG2239m-LED	VG2433-LED	VG2433Smh	VG2437mc-LED	VG2439m-LED	VG2732m-LED
LCD Display	50 cm / 19.5" LED	55 cm / 21.5" LED	55 cm / 21.5" IPS LED	55 cm / 21.5" LED	60 cm / 23.6" LED	60 cm / 23.6" IPS LED	60 cm / 23.6" LED	60 cm / 23.6" LED	68 cm / 27" LED
Resolution	1600 x 900	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080	1920x1080	1920x1080	1920x1080
Aspect Ratio	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9
Brightness	250 cd/m2	250 cd/m2	250 cd/m2	250 cd/m2	300 cd/m2	300 cd/m2	300 cd/m2	300 cd/m2	300 cd/m2
Contrast Ratio	1,000:1	1,000:1	1,000:1	1,000:1	1,000:1	1,000:1	1,000:1	1,000:1	1,200:1
Dynamic Contrast Ratio	20,000,000:1	20,000,000:1	20,000,000:1	20,000,000:1	20,000,000:1	20,000,000:1	20,000,000:1	20,000,000:1	20,000,000:1
Viewing Angles	170°/160°	170°/160°	178°/178°	170°/160°	170°/160°	178°/178°	170°/160°	170°/160°	170°/160°
Response Time	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms	5ms
Video Connectors	D-Sub x 1 DVI x 1 DisplayPort 1.2 x 1	D-Sub x 1 DVI x 1	D-Sub x 1 DVI x 1 HDMI x 1	D-Sub x 1 DVI x 1 DisplayPort 1.2 x 1	D-Sub x 1 DVI x 1	D-Sub x 1 DVI x 1 HDMI x 1	D-Sub x 1 DVI x 1 DisplayPort 1.2 x 1	D-Sub x 1 DVI x 1 DisplayPort 1.2 x 1	D-Sub x 1 DVI x 1 DisplayPort 1.1 x 1
Speakers	2W x 2	N/A	2W x 2	2W x 2	N/A	2W x 2	2W x 2	2W x 2	2W x 2
Audio Connectors	Audio In x 1 Earphone Out x 1	N/A	Audio In x 1 Earphone Out x 1	Audio In x 1 Earphone Out x 1	N/A	Audio In x 1 Earphone Out x 1	Audio In x 1 Earphone Out x 1 MIC In x 1 MIC Out x 1	Audio In x 1 Earphone Out x 1	Audio In x 1
USB	USB Type B x 1 USB Type A 2.0 x 2	N/A	N/A	USB Type B x 1 USB Type A 2.0 x 2	N/A	N/A	USB Type B x 1 USB Type A 2.0 x 2	USB Type B x 1 USB Type A 2.0 x 2	USB Type B x 1 USB Type A 2.0 x 4
Special Feature	ECO Mode	ECO mode	ECO mode	ECO mode	ECO mode	ECO mode	2.0 Mega Pixel Camera ECO mode	ECO mode	ECO mode
Ergonomics	Tilt: 20º ~ -5º Swivel: 360º Height Adjust: 0-80mm	Tilt: 25º ~ -5º Swivel: 340º Pivot: 0~90º Height Adjust: 0-100mm	Tilt: 25º ~ -5º Swivel: 340º Pivot: 0~90º Height Adjust: 0-100mm	Tilt: 20º ~ -5º Swivel: 360º Pivot: 0~90º Height Adjust: 0-135mm	Tilt: 25º ~ -5º Swivel: 340º Pivot: 0~90º Height Adjust: 0-100mm	Tilt: 25º ~ -5º Swivel: 340º Pivot: 0~90º Height Adjust: 0-100mm	Tilt: 25º ~ -6º Swivel: 360º Pivot: 0º ~ 90º Height Adjust: 0-135 mm	Tilt: 20º~-5º Swivel: 360º Pivot: 0~90º Height Adjust: 0-135mm	Tilt: 20º~-5º Swivel: 356º Pivot: 0~90º Height Adjust: 0-135mm
Power Consumption	26W (typ.) / 14W (ECO-mode)	22W (typ.) / 15W (ECO-mode)	22W (typ.) / 15W (ECO-mode)	22W (typ.) / 15W (ECO-mode)	22W (typ.) / 15W (ECO-mode)	22 W(typ.) / 15W (ECO-mode)	24.5W (typ.) / 15.5W (ECO-mode)	24W (typ.) / 15.5W (ECO-mode)	55W (typ.) / 25W (ECO-mode)
Dimension with Stand (W x H x D) (mm) (inch)	466mm x 382mm x 250mm 18.4" x 15.1" x 9.9"	506mm x 361mm x 205mm 20.0" x 14.3" x 8.1"	506mm x 361mm x 205mm 20.0" x 14.3" x 8.1"	513mm x 419mm x 240mm 20.2" x 16.5" x 9.5"	566mm x 383mm x 205mm 22.3" x 15.1" x 8.1"	566mm x 383mm x 205mm 22.3" x 15.1" x 8.1"	557mm x 451mm x 240mm 21.9" x 17.8" x 9.4"	561mm x 436mm x 240mm 22.1" x 17.2" x 9.5"	642mm x 434mm x 242mm 25.3" x 17.1" x 9.5"
Dimension without Stand (W x H x D) (mm) (inch)	466mm x 274mm x 59mm 18.4" x 10.9" x 2.4"	506mm x 312mm x 51mm 18.0" x 12.3" x 2.1"	506mm x 312mm x 51mm 18.0" x 12.3" x 2.1"	513mm x 305mm x 57mm 20.2" x 12" x 2.3"	566mm x 344mm x 51mm 22.3" x 13.6" x 2.1"	566mm x 344mm x 51mm 22.3" x 13.6" x 2.1"	557mm x 341mm x 61mm 21.9" x 13.4" x 2.4"	561mm x 333mm x 58.2mm 22.1" x 13.1" x2.3"	642mm x 392mm x 65mm 25.3" x 15.4" x 2.6"
Weight with Stand	4.66 Kg (10.27 lbs)	4.68 Kg (10.32 lbs)	4.68 Kg (10.32 lbs)	4.66 Kg (10.27 lbs)	5.22 Kg (11.51 lbs)	5.22 Kg (11.51 lbs)	5.18 Kg (11.46 lbs)	5.17 Kg (11.40 lbs)	6.58 Kg (14.51 lbs)
Weight without Stand	3.22 Kg (7.10 lbs)	3.09 Kg (6.81 lbs)	3.09 Kg (6.81 lbs)	3.22 Kg (7.10 lbs)	3.64 Kg (8.02 lbs)	3.64 Kg (8.02 lbs)	3.22 Kg (7.10 lbs)	3.74 Kg (8.25 lbs)	5.22 Kg (11.51 lbs)
VESA® Mount	100mm x 100mm	100mm x 100mm	100mm x 100mm	100mm x 100mm	100mm x 100mm	100mm x 100mm	100mm x 100mm	100mm x 100mm	100mm x 100mm
Kensington Lock Slot	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Compliance	CE, CB, TCO, Gost-R, ROHS, UkrSEPRO, ErP, EnergyStar, EPEAT, FCC, Windows	CE, CB, TCO, CU, Gost-R, ROHS, UkrSEPRO, ErP, EnergyStar, FCC, Windows	CE, CB, TCO, CU, ROHS, UkrSEPRO, ErP, EnergyStar, Windows	CE, CB, TCO, CU , ROHS, UkrSEPRO, ErP, EnergyStar, EPEAT, Windows	CE, CB,TCO, CU, ROHS, UkrSEPRO, ErP, EnergyStar, Windows	CE, CB, TCO, CU, ROHS, UkrSEPRO, ErP, EnergyStar, Windows	CE, CB, TCO, CU, ROHS, UkrSEPRO, EnergyStar, Windows	CE, CB, TCO, CU, Gost-R, ROHS, UkrSEPRO, EnergyStar, EPEAT, FCC, Windows	CE, CB, TCO, CU, ROHS, ErP, EnergyStar, EPEAT, FCC, Windows

TOUCH

Advanced Application in Business and Public Display – With Touch

Touch technology is thriving in this post-PC era and is being widely integrated into business equipment and facilities. With touch technology, interactive display monitors can now be used in many ways. In line with this rising technological trend, ViewSonic has incorporated innovative “Optical Touch” and “Projected Capacitive Touch” multi-touch technology into the TD series of monitors. Equipped with Windows 8 compatibility and MHL technology, users can connect compatible mobile devices for a glitch-free and ultra-smooth touch experience. Cleverly designed with 8H Hardness, ergonomic design, IPS and built-in speakers, the TD monitors are a modern way and a great tool for use at airport counters, hotel receptions, public directories, Points of Sale and more. It also frees up service personnel and allows them to specialize in more personalized services to customers or visitors who require more information. TD series is the best line of monitors for businesses looking for more interactive display solutions that improve the business efficiency yet are aesthetically attractive.

TOUCH PRODUCT LIST

- TD2220-2
- TD2240
- TD2340
- TD2420
- TD2740

Multi-touch PCT Multi-Touch Touch Monitors

With the 22” TD2240, 23” TD2340, 27” TD2740 10-point displays with Projected Capacitive Touch (PCT), users can enjoy a smoother and more accurate touch display experience with increased interactivity. This touch capability allows users to run more engaging applications and programs to increase audience participation during their presentations in public spaces like education institutions. Delivering a best-in-class touch experience, the TD40 displays are Windows 8 Touch Certified. These monitors are certainly the gateway to the new world of interactivity.

Models: TD2240, TD2340, TD2740

Optical Multi-Touch Monitors

Our touch displays also provide 2-point optical touch technology. This touch technology allows users to touch, drag, move, resize by using fingers, stylus or any other objects. With durable glass design, the TD20 displays are suitable for Point of Sales and public directories. Not only sensitive with finger touch, Optical touch displays also work well with stylus and gloved fingers which are ideal for industrial usage as well.

Models: TD2220-2, TD2420

Durable protective glass Strengthen anti-wear protection and increase durability

The panel surface of the TD monitors is highly durable and has strong anti-wear properties, thanks to the 7H – 8H hardness protective glass. This means that the panel surface can withstand impact from objects and scratches, making it perfect for public spaces and educational institutions.

Consistent Colour Performance from Any Angle

With SuperClear™ IPS and VA technology, the TD2240, TD2340 and TD2740 offer extremely wide viewing angles with consistent colour performance.

Models: TD2240 (VA), TD2340 (IPS), TD2740 (VA)

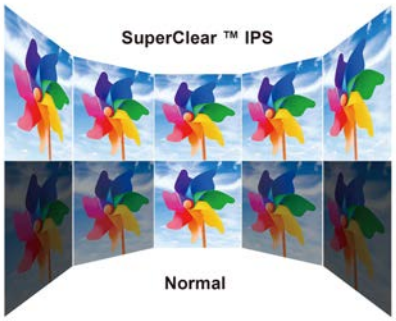

MHL Certified

MHL stands for Mobile High-Definition Link technology. It allows you to display your Smartphone on a larger screen, while charging up your Smartphone. The MHL and HDMI connections share the same ports, providing the TD2240 with flawless streaming from a variety of MHL and HDMI-equipped mobile devices, and the MHL connection allows your mobile devices to use a monitor without turning on a PC/Laptop.

Models: TD2240

HDMI & DisplayPort Inputs

With both HDMI and DisplayPort input ports, this display embraces digital media. HDMI supports most consumer media devices such as computers, A/V receivers, Blu-ray players, digital camcorders and cameras, while DisplayPorts are often found in business computing devices.

Models: TD2340, TD2740

TOUCH

High-Quality Speakers for True Stereo Sound

ViewSonic's TD series are equipped with stereo speakers, for clear audio that sounds like it's coming from a high-end stereo system. The speakers deliver a true stereo effect for an enhanced listening experience, especially when displaying multimedia content during lessons, therefore removing the need for external speakers. With Audio output, users can connect an external headset to the monitors as well.

Models: TD2240, TD2340, TD2420, TD2740

Dual Hinge Ergonomic design for more efficient working environments

The TD series feature fantastic ergonomic design. For example, the TD2340 and TD2240 adopt the new dual hinge design, which enables 90-degree rotation, and wide tilt angle range from -5 to 50 degrees. This adaptable design allows the displays to be vertically and horizontally on desks. Furthermore, the ergonomic design of the TD2740 allows the screen to be tilted and adjusted from 15 to 70 degrees, or rest flat on a table. This makes it well suited to a variety of user scenarios in the home, school or office.

USB ports for convenient and flexible connectivity

The Touch series are equipped with multiple USB ports to provide users with convenient connection options, helping users save time from plugging USB peripherals and accessories into hard-to-reach computer USB ports and expands the numbers of available USB ports.

Model: TD2220-2, TD2240, TD2340

Windows® 8 Compatible

ViewSonic's Touch Displays are Windows 8 compatible and offer users the best Windows 8 experience. By using these Windows 8 compatible displays, businesses can reduce future replacement costs.

Complete Multimedia Package

The TD2740 includes a pair of integrated 2W speakers, a 1.0MP front webcam supports HD video quality, and a microphone for video chatting with internet access. Easily connect with colleagues and friends for work or play.

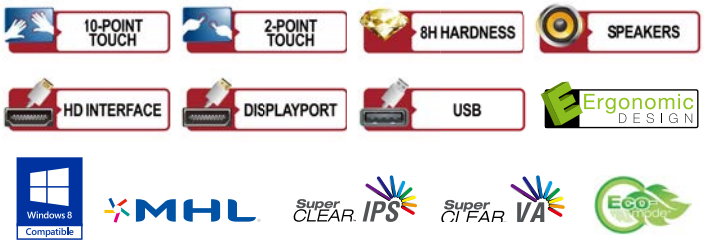

The features vary from model to model. Not every model carries the highlighted features. Please refer to attached spec table for detailed information

SPEC TABLE

Product Model	TD2220-2	TD2240	TD2340	TD2420	TD2740
LCD Display	55cm / 21.5" LED	55cm / 21.5" VA LED	58cm / 23" IPS LED	60cm / 23.6" LED	68cm / 27" VA LED
Resolution	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080
Aspect Ratio	16:9	16:9	16:9	16:9	16:9
Brightness	200 cd/m² (with touch) 250 cd/m² (without touch)	200 cd/m² (with touch) 250 cd/m² (without touch)	200 cd/m² (with touch) 250 cd/m² (without touch)	200 cd/m² (with touch) 250 cd/m² (without touch)	260 cd/m² (with touch) 300 cd/m² (without touch)
Contrast Ratio	1,000:1	1,000:1	1,000:1	1,000:1	3,000:1
Dynamic Contrast Ratio	20,000,000:1	20,000,000:1	20,000,000:1	20,000,000:1	20,000,000:1
Viewing Angles	170°/160°	178°/178°	178°/178°	170°/160°	178°/178°
Response Time	5ms	RT G to G(σ) 6ms (typ.)	7 ms	5ms	12ms
Surface Hardness	Anti-glare, 8H hardness	Anti-glare, 7H hardness	Anti-glare, 7H hardness	Anti-glare, 7H hardness	Anti-glare, 7H hardness
Video Connectors	D-Sub x 1 DVI x 1	D-Sub x 1 HDMI x 1 (MHL 2.0) DisplayPort 1.2 x 1	D-Sub x 1 HDMI 1.4 x 1 DisplayPort 1.2 x 1	D-Sub x 1 DVI x 1 HDMI 1.4 x 1	D-Sub x 1 HDMI 1.4 x 1 DisplayPort 1.2 x 1
Speakers	N/A	2W x 2	2W x 2	2W x 2	2W x 2
Audio Connectors	N/A	Audio In x 1 Earphone out x 1	Audio In x 1 Earphone out x 2	Audio In x 1	Audio In x 1 Earphone Out x 1
USB	USB Type B x 1 (Touch Function) USB Type A x 2	USB Type B x 1 (Touch Function) USB Type A x 4	USB Type B x 1 (Touch Function) USB Type A x 2	USB Type B x 1 (Touch Function)	USB Type B x 1 (Touch Function)
Special Feature	2-Point Optical Touch ECO mode	10-Point Projected Capacitive Touch Dual Hinge MHL ECO mode	10-Point Projected Capacitive Touch Dual Hinge ECO mode SRS Premium Sound	2-Point Optical Touch ECO mode SRS Premium Sound	10-Point Projected Capacitive Touch 1 Mega Pixel Camera ECO mode
Ergonomics	Tilt: 20° ~ -5°	Tilt: 90° ~ -5° Flat: 90°	Tilt: 50° ~ -5° Pivot: 0~90° Flat: 90°	Tilt: 50° ~ -5°	Tilt: 15° ~ 70° Flat: 90°
Power Consumption	26W (typ.) / 18W (ECO-mode)	23W (typ.) / 16W (ECO-mode)	26W (typ.) / 18.5W (ECO-mode)	22W (typ.) / 15W (ECO-mode)	39W (typ.) / 28W (ECO-mode)
Dimension with Stand (W x H x D) (mm) (inch)	511mm x 365mm x 240mm 20.2" x 14.4" x 9.5"	522mm x 397mm x 240mm 20.6" x 15.6" x 9.5"	577mm x 454mm x 325mm 22.7" x 17.9" x 12.8"	577mm x 454mm x 325mm 22.7" x 17.9" x 12.8"	673mm x 419mm x 50mm 26.5" x 16.5" x 2.0"
Dimension without Stand (W x H x D) (mm) (inch)	512mm x 311mm x 67mm 20.2" x 12.3" x 2.7"	522mm x 316mm x 58mm 20.6" x 12.4" x2.3"	577mm x 384mm x 67mm 22.7" x 15.2" x 2.7"	577mm x 454mm x 67mm 22.7" x 17.9" x 2.7"	-
Weight with Stand	4.92 kg (10.85 lb.)	6.41 Kg (14.14 lbs)	9.23 Kg (20.35 lbs)	4.66 Kg (10.27 lbs)	8.8 Kg (19.4 lbs)
Weight without Stand	3.96 kg (8.73 lb.)	4.08Kg (9.00lbs)	6.57Kg (14.48lbs)	3.22 Kg (7.10 lbs)	-
VESA® Mount	100mm x 100mm	100mm x 100mm	100mm x 100mm	100mm x 100mm	100mm x 100mm
Kensington Lock Slot	Yes	Yes	Yes	Yes	Yes
Compliance	CE, CB, TCO, Gost-R, CU, ROHS, UkrSEPRO, ErP, EnergyStar, EPEAT, FCC, Windows	CE, CB, TCO, Gost-R, CU , ROHS, UkrSEPRO, ErP, EnergyStar, EPEAT, FCC, Windows	CE, CB, TCO, Gost-R, CU, ROHS, UkrSEPRO, EnergyStar, EPEAT, FCC, Windows	CE, CB, TCO, Gost-R, CU, ROHS, UkrSEPRO, ErP, EnergyStar, EPEAT, FCC, Windows	CE, CB, CU, ROHS, ErP, FCC, CU, UKrSEPRO, Windows

PROFESSIONAL

Brilliant Display Performance for Professional Designers and Photographers

For professional designers and photographers, display quality has to be top of the line in order to avoid image distortion and colour inaccuracy. Professional designers and photographers have to use monitors featuring the best display quality. ViewSonic has introduced the VP series, equipped with superior features, in an effort to answer to these profesionnals' need for the highest standard quality monitors. The VP series feature cutting-edge ultra-high resolution, 99% Adobe RGB, 10 bit colour demonstration, 12 bit colour engine, low Delta E colour accuracy, IPS wide-viewing angle, and ergonomic design—making ViewSonic's VP series the ultimate display solution with brilliant performance for professionals. ViewSonic's VP series provide professional designers, Computer-aided designers, manufacturers (CAD/CAM) and photographers with the critical top-notch image quality and colour accuracy that they need.

PROFESSIONAL PRODUCT LIST

- VP2365-LED
- VP2770-LED
- VP2772

WQHD Resolution Redefines each perfect image detail

Exclusively built for professionals who require high definition images, the VP series boast WQHD 2560 x 1440 resolution for incredibly true-to-life images. WQHD 2560 x 1440 resolution delivers 80% more pixels than Full HD 1920 x 1080 and increases the Pixels per Inch by up to 30%. The VP series are perfect for graphic designers, photographers, or financial sectors.

WQHD Model: VP2770-LED, VP2772

99% Adobe RGB colour space for the richest and most accurate colours

99% Adobe RGB ensures that all your graphic design work is displayed with the richest and most accurate colours during presentations, at exhibitions, in work spaces, at the office or more. This means your original high-resolution images are depicted as accurately as possible. Adobe RGB colour gamut makes this line of displays extremely well-suited to graphics-focused applications for media creation, graphic design work, CAD/CAM drawing, desktop publishing and many more.

Model: VP2772

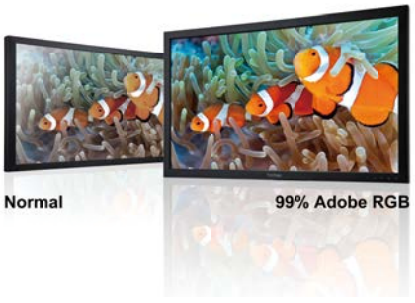

10 Bit high colour demonstration performance For 1.7 billion truest colour

With the latest 10 bit colour processing, the VP series produce 1.7 billion colours, which is 64 times more colours than conventional monitors, to generate the smoothest, most natural colour depth and the most brilliant and splendid images. The broad gradient colour capability is perfect for professionals who require monitors that reproduce only the truest colours.

Model: VP2772

A Charming Woman
Michelle BlackSmith
"I expect the challenge and conquer it."
How to present your personality in style?
3 tips to follow...
Eat Slowly to be Healthier
1. Drinking 500 c.c water before eating
2. The French way to dine.
Limited edition

12-bit colour engine reproduces true-to-life colours

ViewSonic's VP displays use a 12-bit colour engine with 14-bit LUT to handle image colour rendering and to display HD content. The 12-bit colour engine processes and displays 12-bit input signals without reducing the signal quality—ensuring true-to-life colours to showcase the true potential of your work.

Model: VP2772

Delta E≦3 colour accuracy No colour distortion across devices

ViewSonic's Delta E≦3 colour accuracy means superior colour reproduction on all of our monitors. With Delta E ≦3 colour accuracy, image colours captured by your camera are accurately reproduced on your display—and on daisy-chain displays—with absolutely no colour differences. During production, each of our displays is calibrated by technicians so that the colours on each display meet the Delta E-standard of 3. This way, every display has the same phenomenal colour performance.

Model: VP2770-LED, VP2772

SuperClear™ IPS wide viewing angles for consistent colour performance

ViewSonic's SuperClear™ IPS (In-Plane Switching) is a high-end LCD technology that reduces the amount of light scattering to offer you 178-degree vertical and horizontal wide viewing angles. SuperClear™ IPS displays also feature accurate colour reproduction to provide users with an excellent viewing experience. Experience accurate, vivid colours, and consistent brightness levels whether you're looking at the screen from above, below, the front or the side.



PROFESSIONAL

Ergonomic design for comfortable working environments

The VP series feature a fantastic ergonomic design. The adjustable monitor base suits any working environment. Users can adjust the base from front to back with 25° of adjustment as well as 90° of rotating pivot, 120° of horizontal swivel and a height adjust of up to 15 cm. Multi-adjusting ergonomic designs and 16:9 wide viewing screen size effectively reduce fatigue and provide users with a delightful viewing experience which enhances work efficiency.

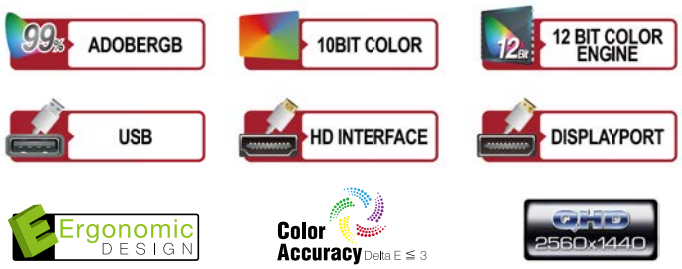

The features vary from model to model. Not every model carries the highlighted features. Please refer to attached spec table for detailed information

SPEC TABLE

Product Model	VP2365-LED	VP2770-LED	VP2772
LCD Display	58cm / 23" e-IPS LED	68cm / 27" IPS LED	68cm / 27" IPS LED
Resolution	1920 x 1080	2560 x 1440	2560 x 1440
Aspect Ratio	16:9	16:9	16:9
Brightness	250 cd/m2	300 cd/m2	350 cd/m2
Contrast Ratio	1,000:1	1,000:1	1,000:1
Dynamic Contrast Ratio	20,000,000:1	20,000,000:1	20,000,000:1
Viewing Angles	178°/178°	178°/178°	178°/178°
Response Time	6 ms	8 ms	6 ms
Video Connectors	D-Sub x 1 DVI x 1	D-Sub x 1 DVI x 1 DisplayPort 1.2 x 1 HDMI 1.4	D-Sub x 1 DVI x 1 Display port 1.2 x3 (Input x 2, output x1) HDMI 1.4 x 1
USB	USB Type B x 1 USB Type A x 4	USB Type B x 1 USB Type A x 4 (USB 2.0 x2, USB 3.0 x2)	UBS Type B x 1 USB Type A 3.0 x 4
Special Feature	ECO mode	10 Bit Colours (DisplayPort) Delta E ≤3 ECO mode	10 Bit Colours 12 Bit Colour Engine 99% AdobeRGB 100% sRGB 104% NTSC(CIE1931) 120% NTSC(CIE1976) Delta ≤ 3 ECO mode
Ergonomics	Tilt: 20º ~ -5º Swivel: 360º Height Adjust: 0~135mm Pivot: 0~90º	Tilt: 23º ~ -5º Swivel: 120º Height Adjust: 0~150mm Pivot: 0~90º	Tilt: 23º ~ -5º Swivel: 120º Height Adjust: 0~150mm Pivot: 0~90º
Power Consumption	45W (typ.) / 24W (ECO-mode)	45W (typ.) / 22W (ECO-mode)	45W (typ.) / 22W (ECO-mode)
Dimension with Stand (W x H x D) (mm) (inch)	548mm x 434mm x 250mm 21.6" x 17.1" x 9.9"	643mm x 470mm x 348mm 25.3" x 18.5" x 13.7"	643mm x 470mm x 348mm 25.3" x 18.5" x 13.7"
Dimension without Stand (W x H x D) (mm) (inch)	548mm x 326mm x 64mm 21.6" x 12.9" x 2.6"	643mm x 382mm x 56mm 25.3" x 15" x 2.2"	643mm x 382 mm x 56mm 25.3" x 15" x 2.2"
Weight with Stand	5.4 kg (11.9 lb.)	8.45 kg (18.59 lb.)	8.45 kg (18.59 lb.)
Weight without Stand	3.3 kg (7.3 lb.)	5.8 kg (12.79 lb.)	5.8 kg (12.79 lb.)
VESA® Mount	100mm x 100mm	100mm x 100mm	100mm x 100mm
Kensington Lock Slot	Yes	Yes	Yes
Compliance	CE, CB, TCO, Gost-R, CU , ROHS, ErP, EnergyStar, EPEAT, FCC, Windows, GS	CE, CB, TCO, Gost-R, ROHS, ErP, EnergyStar, EPEAT, FCC, Windows, GS, CU	CE, CB, TCO, Gost-R, ROHS, ErP, EnergyStar, EPEAT, FCC, Windows, GS, CU

THIN CLIENT & DISPLAY

ViewSonic Delivers Tomorrow's Thin Client Today

As enterprises develop and adopt productivity apps that change the way they do business, IT organisations are driven to make significant investments in enterprise mobility solutions. By extending these mobile solutions to Smart Displays running the Android operating system, enterprises can standardise on apps and mobile management tools for both mobile and smart devices, reducing IT complexity and streamlining costs. ViewSonic's new thin client takes advantage of this management and control by integrating Citrix XenMobile into its new devices, including the 24" SD-A245 and 22" SD-A225, to give IT organizations the ability to manage both their mobile and smart devices seamlessly.

SMART DISPLAY PRODUCT LIST

- SD-A245
- SD-A225
- SC-T45
- SC-T35

Dual point Optical Touch for intuitive operation

The smart display client is equipped with Dual Point Optical Touch technology that enables users to enjoy a responsive, tablet-like browsing experience. Users can also utilize the Smart Display client as a Full HD Touch display to connect to existing PCs, laptops, or tablets.

Multimedia ready

With a built-in webcam, integrated microphone and speakers, and 1920x1080 Full HD resolution, ViewSonic's Smart Display offers a complete multimedia package for everything from video conferencing, to streaming high resolution content.

Run local applications

The SD-A245 can be used offline to run local applications without any demands on backend PC servers. Locally running content also reduces network bandwidth.

Versatile connectivity options

For further functionality and interactivity, the Smart Display client offers a number of connectivity options including HDMI, two full-sized USB ports, a micro USB, a mini USB and SD card storage. The SD-A245 also has integrated RJ45 Ethernet, Wi-Fi and Bluetooth for connecting to the internet and cloud.

Natively run multimedia

Running full HD videos with fast playback is a challenge for many desktop virtualization infrastructures, but ViewSonic's Smart Display client can run multimedia files natively at blazing-fast speeds while also reducing network bandwidth.

Awesome computing power

Equipped with the powerful NVIDIA Tegra 3 quad-core processor, the SD-A245 provides smooth, lightning-fast computing no matter what applications are running.

THIN CLIENT & DISPLAY

Simplify IT needs

The SD-A245 supports use cases where the IT staff deploys SaaS and Web applications, without any backend virtualization infrastructure—this significantly simplifies IT's infrastructure needs, but still provides a managed and secure environment.

CITRIX XenMobile

CITRIX ready

The features vary from model to model. Not every model carries the highlighted features. Please refer to attached spec table for detailed information

Item	Traditional Thin Client	ViewSonic SD-A245
Secure by design with reduced virus and malware attack	✓	✓
Centrally managed and application provisioning	✓	✓
Simple back-up and restore	✓	✓
Speed of deployment and replacement	✓	✓
Low power consumption	✓	✓
Ability to access virtual Window® desktops	✓	✓
Designed for today's touch screen UI		✓
Ability to run native multimedia		✓
Off-line usage with ability to run native local applications		✓
Ability to manage SaaS and wed-based applications		✓
Compatible with XenMobile device management software		✓
User personalization, cool factor and acceptance		✓

SPEC TABLE

Product Model		SD-A245	SD-A225	SC-T45	SC-T35
Processor		NVIDIA Tegra® 33	TI OMAP4470 Dual Core 1.5GHz	Intel Atom N2800 Dual Core 1.87GHz Graphic Chipset - Intel NM10	TI DM8148 ARM CPU Processor Speed 1.0 GHz
LCD Display		24" (23.8" viewable) Wide Color TFT Transmissive LED	22" (21.5" viewable) Wide Color TFT Transmissive LED		
Resolution		1920 x 1080	1920 x 1080		
Aspect Ratio		16:9	16:9		
Brightness		250 cd/m2 (typ.)	250 cd/m2 (typ.)		
Contrast Ratio		1000:1 (typ.)	1000:1 (typ.)		
Viewing Angles		170º horizontal, 160º vertical	170º horizontal, 160º vertical		
Response Time		5ms (typ.)	5ms (typ.)		
Surface Hardness		8H	8H		
Backlight		White-light LED	White-light LED		
Backlight Life		30,000 hours (min.)	30,000 hours (min.)		
Touch		Optical touch type	Optical touch type		
Memory		1GB (DDR3) Storage Memory 8GB (eMMC4.4)	1GB (DDR2) Storage Memory 8GB (eMMC4.4)	DDR3 2GB @ 1066MHz Storage 4GB Flash	DDR3 1GB @ 800MHz Storage 512MB Flash
Software		Operating System Android™ 4.2 with Citrix XenMobile	Operating System Android™ 4.1 with Citrix XenMobile	Operating System Windows Embedded Standard 7 Management ViewSonic Device Manager / ViewSonic Client Setup Protocols Citrix ICA/HDX 13.1 , VMware View 5.01, Microsoft RDP 8.0 with RemoteFX, PCoIP (software accelerated) Network Standard Local Browser, Media Player, Gigabit Ethernet, DHCP, SSL, PPPoE, Wake on LAN	Operating System Linux Management ViewSonic Device Manager / ViewSonic Client Setup Protocols Citrix ICA/HDX 12.2.3, VMware View 5.01, Microsoft RDP7.1 with RemoteFX Network Standard Gigabit Ethernet ,DHCP, SSL, PPPoE, Wake on LAN
Communication		RJ45, Wi-Fi 802.11 b/g/n, Bluetooth V4	RJ45, Wi-Fi 802.11 b/g/n, Bluetooth V2	Ethernet LAN 10/100/1000 MB Wireless LAN 802.11 b/g/n with optional wireless USB adapter (WPD-100)	Ethernet LAN 10/100/1000 MB Wireless LAN 802.11 b/g/n with optional wireless USB adapter (WPD-100)
Connector		HDMI (with MHL) Headphone jack Power DC-In jack (ID 1.7mm, OD 4.0mm)	HDMI Micro HDMI Audio Headphone jack Power DC-In jack (ID 1.7mm, OD 4.0mm)	Video Out DVI-D (x1) / VGA LAN RJ45 (x1) Microphone In 3.5mm mini jack (x1) Headphone 3.5mm mini jack (x1) Power DC In	Video Out DVI-D (x1), DVI-I (x1) LAN RJ45 (x1) Microphone In 3.5mm mini jack (x1) Headphone 3.5mm mini jack (x1) Power DC In
USB		Type A (x2), micro USB (x1), mini USB (x1)	Type A (x2), micro USB (x1), mini USB (x1)	USB 2.0 (x2 front, x2 rear)	USB 2.0 (x2 front, x2 rear)
Memory Card		SD card	Micro SD card		
Camera		2.0MP – HD 1080p	1.3MP		
Audio		2-watt (x2)	1-watt (x2)		
Power	Voltage	AC-DC power (Input: 100V~240V / Output: DC 19V , 3.4 A)	AC-DC power (Input: 100V~240V / Output: DC 19V , 3.4 A)	12V DC; 3A, 36W	5V DC; 3A, 15W
	Consumption	65W (typ.)	36W (typ.)	14W (typ)	8W (typ)
Operating Conditions	Temperature	32–104º F (0–40º C)	32–95º F (0–35º C)	32–104ºF (0–40ºC)	32–104ºF (0–40ºC)
	Humidity	20–90% (non-condensing)	20–90% (non-condensing)	10–90% (non-condensing)	10–90% (non-condensing)
Dimensions (WxHxD)	Physical	24.0 x 18.9 x 3.0 in. 610 x 480 x 75 mm	20.2 x 13.9 x 2.2 in. 512.8 x 353 x 56.6 mm	1.6 x 5.6 x 4.1 in. 39.5 x143 x 103 mm(with stand)	1.6 x 5.6 x 4.1 in. 39.5 x143 x 103 mm(with stand)
	Packaging	29.0 x 20.5 x 6.5 in. 735 x 520 x 164 mm	23.6 x 16.9 x 4.9 in. 598 x 428 x 123 mm	7.9 x 5.0 x 6.2 in. 200 x 128 x 157 mm	7.9 x 5.0 x 6.2 in. 200 x 128 x 157 mm
Weight	Net	15.9 lb. / 7.2 kg	10.6 lb. / 4.8 kg	1.2 lb. / 0.5 kg	1.0 lb. / 0.5 kg
	Gross	18.7 lb. / 8.5 kg	12.8 lb. / 5.8 kg	2.5 lb. / 1.1 kg	2.2 lb. / 1.0 kg
Wall Mounts		Vesa Mount: 100 x 100 mm	Vesa Mount: 100 x 100 mm	VESA: 100mm x 100mm	VESA: 100mm x 100mm
Regulations		CE, CB, BSMI, NCC, C-Tick, UL/CUL, FCC-B (including ICES003), FCC-C, IC RSS-210, China CCC, SRRC, Gost-R, FAC, WEEE, RoHS, REACH, SVHC, ErP, Argentina CNC	CE, CB, BSMI, NCC, C-Tick, UL/CUL, FCC-B (including ICES003), FCC-C, IC RSS-210, China CCC, SRRC, Gost-R, FAC, WEEE, RoHS, REACH, SVHC, ErP, Argentina CNC	FCC/NRTL, ENERGY STAR® , EPEAT Silver, WEEE, RoHS compliant, REACH compliant	FCC, ENERGY STAR® , EPEAT Silver, WEEE, RoHS compliant, REACH compliant
Package Contents		SD-A245 smart display client Power cord and adapter Micro USB cable Mini USB cable Quick start Guide	SD-A225 smart display client Power cord and adapter Micro HDMI to HDMI cable Micro USB to USB cable Quick start Guide	SC-T45 Thin Client, power cord, power adapter, Stand/VESA mounting bracket, Quick Start Guide, ViewSonic Wizard CD	SC-T35 Thin Client, power cord, power adapter, DVI-I to VGA adapter, Stand/VESA mounting bracket, Quick Start Guide, ViewSonic Wizard CD

Finch Club, helping your business do more business

Be sure to make Finch Club your first point of contact for all things ViewSonic

Finch Club is a dedicated on-line portal for all our Channel Partners: Distributors, Resellers, Retailers, E-tailers, DMR and many more. Finch Club is a secure site where only our approved members can access and view specific ViewSonic information.

A portal designed with you in mind:

- Product Support: information, technical specs, images, tutorials and rich content
- Marketing Support: creatives, case studies, awards, reviews, news and events
- Promotional Support: exclusive to Finch Club members only
- Partner Support: dedicated sales support, demo units and project registrations

For all sales/marketing enquiries please email us at:

marketing@viewsoniceurope.com

ViewSonic EMEA Sales Operations

United Kingdom	Germany	Russian Federation	France
Ireland	Austria	Azerbaijan	Turkey
Sweden	Switzerland	Republic of Kazakhstan	Italy/Spain/Portugal/Malta
Norway	Hungary	Ukraine/Uzbekistan	Cyprus/Greece/Gibraltar
Finland	Czech Republic	Moldova/Belarus	Slovenia/Albania/Croatia
Denmark	Slovak Republic	Armenia/Georgia	Montenegro/Serbia/Bulgaria
Iceland	Poland	Latvia/Estonia/Lithuania	Macedonia/Bosnia/Herz/Romania

ViewSonic EMEA Headquarter

ViewSonic Europe Ltd, Level 10, Tower 4225 Old Broad Street, London, EC2N 1HQ
Tel: 0044 (0) 207 382 8250

www.viewsoniceurope.com